SHOTOKU
BROADCAST SYSTEMS
www.shotoku.co.uk

TR-16B Panel

Compact On-Air Control Solution

The TR-B Control panel is designed for easy, effortless on-air operation. Using the Tally interface, the TR-B is able to always follow the on-air camera providing an operator with a quick and reliable method of fine tuning camera positions.

The control panel is able to store 10 shots per camera, which makes the TR-B an ideal control panel for smaller systems as used on game shows and remote news facilities, as well as a fall- back unit in large multi-operator, multi-camera systems.

Ethernet and RS422 outputs give both forward and backward compatibility with all Shotoku robotic products as well as units from manufacturers such as Radamec meaning that you don't need to replace entire systems at one time during upgrades.

Advanced interface options provide connections to preview monitor switches, tally outputs and production switches for auto selection of the on-air camera as well as automation systems minimizing workload and therefore operator errors.
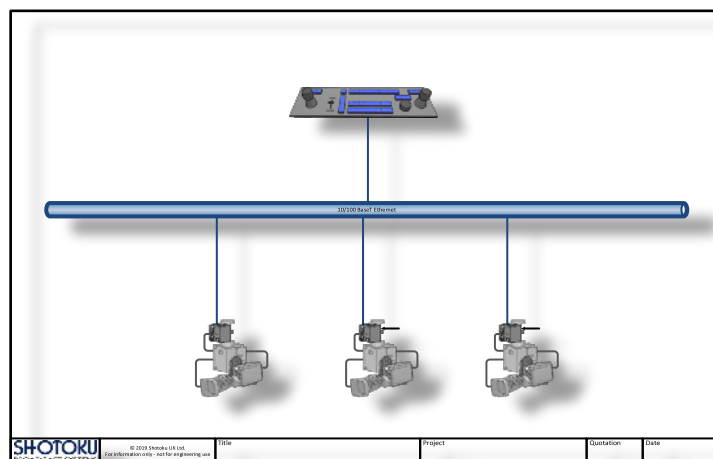
APPLICATIONS

News, Sports & Current Affairs

Virtual Studios

TR-B System Configuration

☐ FEATURES

- Control up to 16 cameras

- Simple control system for On-Air use

- 10 shots per camera

- Automatic 'On-Air' camera selection

- Controls existing legacy heads

☐ SPECIFICATIONS

Controls	3-axis proportional joystick for Pan, Tilt and Zoom
	Assignable rotary encoders for Focus, Pan, Tilt and Zoom
	Adjustable fade times
	10 individual shot selection button
	Individual Pan & Tilt reverse functions
	16 dedicated camera selection keys with on air tally
	Fade, Cut, Swoop and Stop
Connections	RS-42 & Ethernet camera control ports
	RS-232/RS-422 Automation interface
	GPI In/Out Switcher Tally
Size	19" Rack Mount, 3RU high
Power	100-240V AC 50/60Hz