

3 Hot Panels 19" Mounted

## Hot Control Panel


The TR-HP Hot Panel provides a unique enhancement to any Shotoku control system. Intended for use as a supplementary control panel within a TR-T or TR-S based system, the Hot Panel enables a multi-tasking operator to easily adjust camera positions without requiring access to the full control panel.

Designed to be flexible, the panel supports up to 12 assignable function push buttons (e.g. Camera Select, Auto-On Air, Zoom Off) in addition to the Joystick and rotary control. For ease of use and portability connection is made directly to the Shotoku 10/100BaseT Ethernet network, and may be easily powered via Power-Over-Ethernet (PoE) systems.

The TR-HP is ideal for mounting in a small, moveable, desktop case in areas where full panels are not appropriate. It is even possible to mount up to three panels in a single 19" x 4RU frame, providing an "always-on" direct control for multiple cameras in the system.

## APPLICATIONS

-  News, Sports & Current Affairs Studios
-  Parliaments and Legislatures

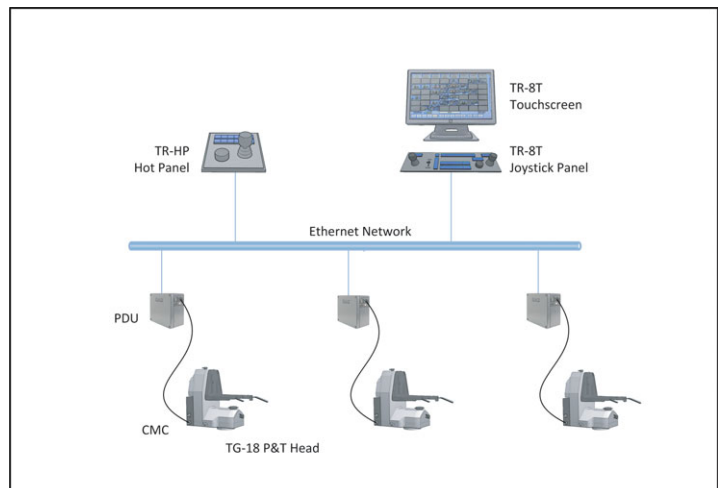

3 Camera System with TR-T Controller and TR-HP Hot Panel

## FEATURES

- Up to 12 Push Button Functions
- Precision Three-Axis Joystick
- Rotary Focus Control
- On-Air and Travel Limit Indication
- Automatic On-Air Camera Selection
- Single Power Over Ethernet Connection
- Compact Size (3 panels in 19")

## SPECIFICATIONS

Controls	3-axis Proportional Joystick for Pan, Tilt and Zoom Rotary Encoder for Focus Dedicated Camera Selection Buttons with 'On-Air' Tallies 12 Push Button Functions (Definable)Controls
Connections	Ethernet 10/100BaseT RJ45 (with PoE)
Size	204 x 156 x 74mm (HxWxD) 19" x 4RU x 67mm (Three-panel Frame)
Power	<2W 48v (IEEE802.3af Power-over-Ethernet)