



Hot Control Panel

The TR-HP Hot Panel provides a unique enhancement to any Shotoku control system. Intended for use as a supplementary control system within a TR-T or TR-S based system, the Hot Panel enables a multi-tasking operator to easily adjust camera positions without requiring access to the full control panel.

The panel was designed to be flexible, supporting up to 12 assignable function push buttons (e.g. Camera select, Auto On-Air, Zoom Off) in addition to the joystick and rotary control. For ease of use and portability, connection is made directly to the Shotoku 10/100 BaseT Ethernet network, and may be easily powered via Power-over-Ethernet (PoE) systems.

The TR-HP is ideal for mounting in a small, moveable, desktop case in areas where full panels are not appropriate. It is even possible to mount up to three panels in a single 19"x4RU frame, providing an "always-on" direct control for multiple cameras in a system.


Features

- Up to 12 Push Button functions
- Precision Three-Axis Joystick
- Rotary Focus Control
- On-Air and travel limit indication
- Automatic On-Air camera selection
- Single Power over Ethernet connection
- Compact size (3 panels in 19")



APPLICATIONS

NEWS, SPORTS & CURRENT AFFAIRS
PARLIAMENTS AND LEGISLATURES

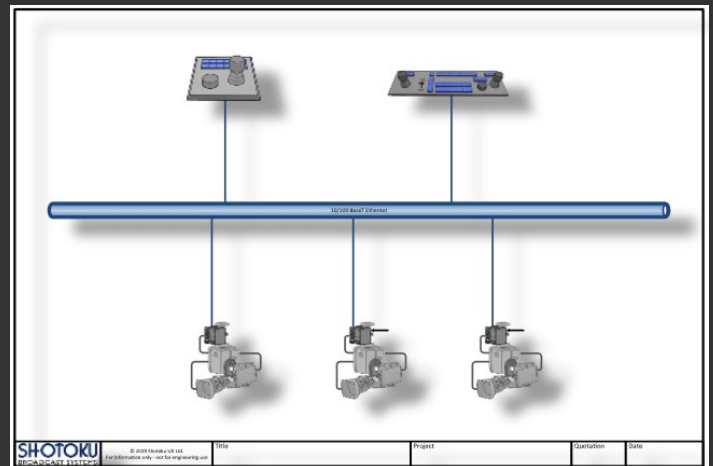

3 Camera system with TR-B Panel and TR-HP Hot Panel

SPECIFICATIONS

CONTROLS

3-Axis proportional joystick for Pan, Tilt, and Zoom
Rotary encoder for focus
Dedicated camera select buttons with 'On-Air' Tallies
12 Push buttons functions (definable) controls

CONNECTIONS

Ethernet 10/100 BaseT RJ45 (with PoE)

SIZE

204 x 156 x 75mm (HxWxD)
19" x 4RU x 67MM (Three-Panel frame)

POWER

<2W 78v (IEEE802.3af PoE)